




GLUE DOWN
luxury vinyl tile

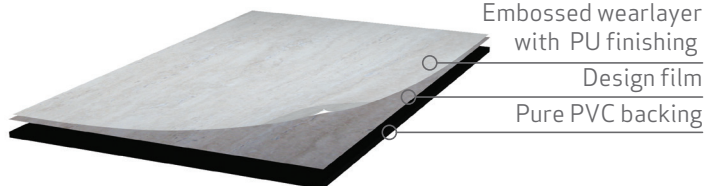

Premium design flooring
with unique
characteristics.

GLUE DOWN	HERRING BONE XL	ORIGINALS / TREND	SUPER MATTE OAK / SUPER MATTE COTTAGE OAK	MOONLIGHT / STONE	XL SLATE	CONTRACT / CONTRACT XL	SIGNATURE SENSES / RUSTIC SENSES	EXTEND OAK SENSES / EXTEND PINE SENSES	LUNGO / LUNGO SENSES
Dimensions EN 427	608 x 152 x 2,5mm	1212 x 222 x 2mm 1212 x 222 x 1,5mm	1212 x 222 x 2mm	622 x 452 x 2mm	1212 x 452 x 2mm	1220 x 228 x 2,5mm 1800 x 230 x 2,5mm	1220 x 228 x 2,5mm	1524 x 229 x 2,5mm	1829 x 229 x 2,5 mm
Emboss / Surface	Regular Wood Emboss Semi-matte	Regular Wood Emboss Semi-matte	Deep Wood Emboss Super-matte	Regular Stone Emboss Semi-matte	Regular Slate Emboss Semi-matte	Regular Wood Emboss Semi-matte	Registered Emboss Semi-matte	Registered Emboss Semi-matte	Regular Wood Emboss / Registered Emboss Semi-matte
Class EN 649	33	32	32	32	32	33	42	42	32
Weight EN 430	3,6 kg/m ²	3,6 kg/m ²	3,6 kg/m ²	3,6 kg/m ²	3,6 kg/m ²	3,6 kg/m ² 4,5 kg/m ²	4,5 kg/m ²	4,5 kg/m ²	3,6 kg/m ²
Impact Sound Reduction EN 140	5 dB								
Dimensional Stability EN 434	Approved								
Fire Resistance EN 131501	Bfl - S1								
Chemical Resistance EN 423	Class 0 - Good								
Abrasion Wear EN 425	Pass Castor Chair (W)								
Slippery Resistance EN 13893	DS (R9 very secure)								
Indentation EN 433	max 0,08mm								
Anti-static Resistance EN 1815	< 2kV								
Toxicity EN 71	Non Toxic								
Resistance to Fading ISO 105 B02	6/8 Good								
AbBB/Dibt low VOC (U-Sign)	Certified								
Thermal Resistance EN 12524	0,019 m ² K/W								
Underfloor Heating	Approved 28°C								



AUTHENTIC LOOK



LOW VOC



ANTI-SLIPPERY



RESISTANT



GLUE DOWN



PHTHALATE FREE



ANTI-STATIC



OK RADIANT HEATING

