



TECHNICAL INFORMATION / corkart.pt

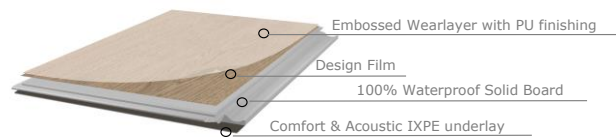

**Waterproof floating floors with super resistant board.**  
Perfect for large areas up to 400m2, no joints required.

TEST	STANDARD	METROPOLITAN COLLECTION
Dimensions	EN 427 / EN 428	1230 x 228 x 5,5 mm (including 1mm IXPE underlay)
Emboss / Surface		Regular Wood Semi-matte
Impact Sound Reduction	EN 140	19 dB
Use Classification	EN 16511	33
Weight	EN 430	9,36 kg/m <sup>2</sup>
Fire Performance	EN 13501	Bfl - s1
Anti-Sliding Properties	EN 13893	Class DS
Dimensional Stability After Exposure to Heat	EN ISO 23999:2018/08	-0,05 length / 0,00 width
Static Indentation	EN ISO 24343	0,00 mm
Chemical Resistance	EN 423	Class 0 - Good
Anti-static Resistance	EM 1815	< 2kV
Determination of the Effect of a Castor Chair	EN 425:2022-04	No visible change after 10.000 cycles
Microscratch Resistance	EN 16094	MSR-B1
Resistance Against Staining	EN 438-2:2016	Group 1, 2 and 3: grade 5
Locking strenght - short side joints - long side joints	En ISO 10582:2018-01, Annex D	4.6 kN/m 5.5 kN/m
Underfloor Heating		Approved 27°C
Thermal Resistance	EN 12667:2001-01	0,010 (m <sup>2</sup> K)/W
French VOC Regulation		A+
Peel Resistance	EN 1464:2010-02	2,11N/mm
Resistance to Fading	ISO 105 B02	6/8 depending on design

